

Product information

Programmable Display V9060iT Series

Read online: <http://monitouch.fujielectric.com/site/v9-e/v9060it-01.html>

V9060iT series 5.7 inches TFT 260k Colors VGA 3ch Serial (D-sub15) SD I/F A/mini B USB COM I/F LAN 1ch



V9060iTD



V9060iTBD



- [Product specifications](#)
- [Interface / Dimensions and Part Names](#)
- [System Configuration](#)
- [Model](#)

Dimensions and Part Names

		V9060iT
Power supply	Rated voltage	DC24V
	Permissible range of voltage	±10%
	Permissible momentary power failure	within 1ms
	Demand (maximum rating)	13W or less
Insulation resistance		DC500V 10MΩ or more

		V9060iT
Physical environment	Ambient temperature	0~50°C*1
	Ambient humidity	85%RH or less (without dew condensation)*1
	Operation altitude	2,000 meters or lower
	Atmosphere	Not to be exposed to corrosive gas, or conductive dust
	Storage temperature	-10~60°C*1
	Storage humidity	85%RH or less (without dew condensation)*1
	Overtoltage category	Category II
	Contamination level	Level 2
Mechanical operating conditions	Resistance to oscillation	Complies with JIS B 3502 (IEC61131-2) Vibration frequency: 5~9Hz, pulsating with:3.5mm, 9~150Hz, Acceleration: 9.8m/s ² (1G),X,Y,Z: 3 directions (10 times each)
	Resistance to shock	Complies with JIS B 3502 (IEC61131-2) Peak acceleration: 147m/s ² (15G), X,Y,Z: 3 directions, three times each (18 times in total)
Electric operating conditions	Resistance to noise	Noise voltage: 1,000Vp-p, pulse width: 1μs, pulse rise time: 1ns
	Resistance to static discharge	Complies with IEC61000-4-2, contact: 6kV, air: 8kV
Installation conditions	Grounding	Grounding resistance: Less than 100Ω, FG/SG separation
	Structure	Front panel: Complies with IP66, Type 4X/13 (when waterproof gasket is installed) Rear cover: Complies with IP20 Form: Single unit, Installation method: Panel mounting
	Cooling system	Natural air cooling
	Dimensions W*H*D(mm)	182.5×138.8×53.0
	Dimensions W*H*D(mm)	174.0×131.0 (+0.5/-0)
Case color		Light gray (black front housing for black model)
Material		PC

- *1: Keep wet bulb temperature under 39°C to avoid malfunction.


Performance Specifications

Screen memory (FROM)		64MB
Backup memory (SRAM)		800KB
Display	Display device	TFT color LCD
	Resolution	640×480
	Display size	5.7"
	Colors	260,000 *2
	Backlight	LED
	Backlight life	50,000 hours
Touch switch	Type	Analog resistance film
Function switch	Quantity	6
External interface	D-Sub 9-pin (CN1)*3	RS-232C, RS-485(two-wire system), RS-422(four-wire system), Asynchronous type, Data length: 7,8 bits, Parity: even, odd, none, Stop bit: 1, 2 bits, Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200 bps
	Modular 8-pin (MJ1/ MJ2)	RS-232C, RS-485(two-wire system), RS-422(four-wire system)*4 , Asynchronous type, Data length: 7,8 bits, Parity: even, odd, none, Stop bit: 1, 2 bits, Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500*5 bps
	SD card	One card slot provided as standard
	Ethernet	1ch, Baud rate: 100Mbps, 10Mbps
	Wireless LAN	-
	USB	Type A、 Type mini-B(Ver.2.0)
	Sound output	-
Clock	Backup period	5 years (Ambient temperature 25°C)
	Calendar accuracy	Gap ±90 sec. per month (Ambient temperature 25°C, when power is not supplied)
Standard	CE marking	EN61000-6-2,EN61000-6-4,EN50581
	UL·cUL	UL508,ANSI/ISA 12.12.01
	KC	Compliant *6
	Radio Act	-

- *2: For the display of pictures, 3D parts and videos only. Other parts are displayed in 65,536 colors.
- *3: Optional unit (DUR-00) is required for the V9071iW and V9060iTD.
- *4: MJ2 only
- *5: Available only when connected with SIEMENS MPI/PPI.
- *6: Black model not certified.




Dimensions and Part Names

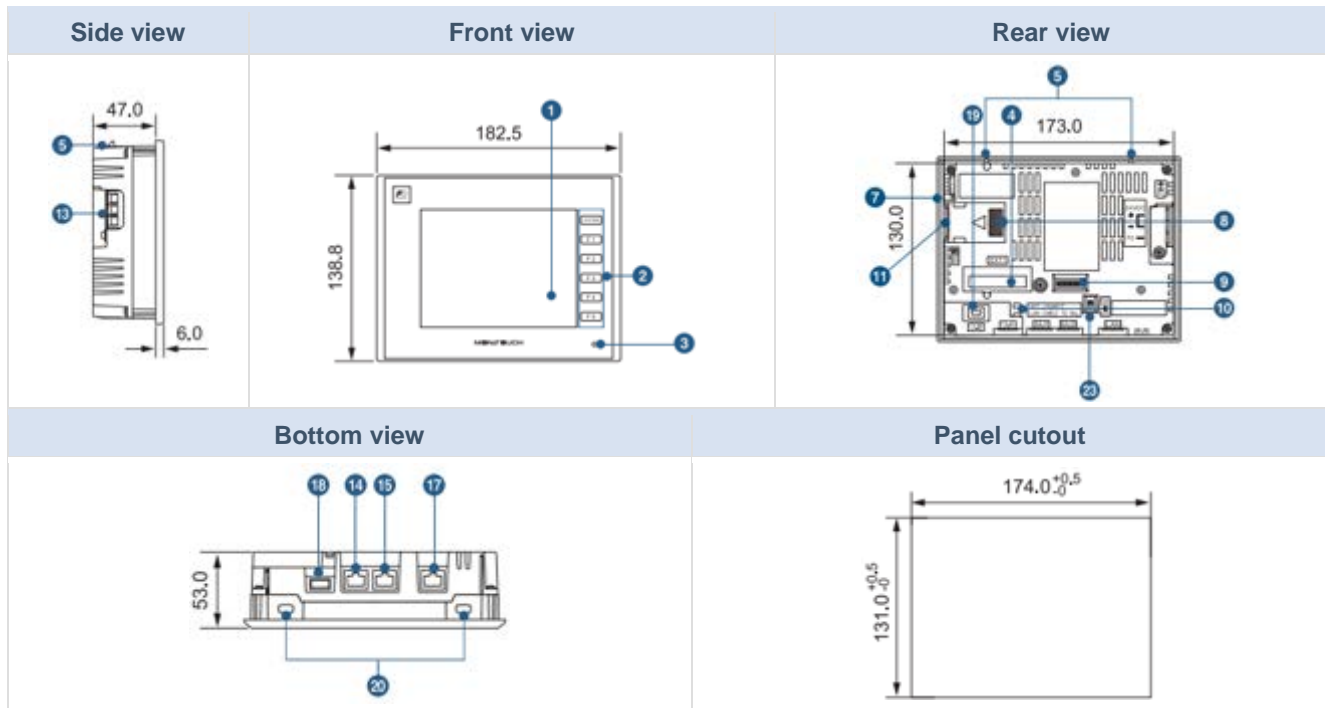(Unit: mm)




Part Names

1. **1** Display
2. **2** Function switch
3. **3** Power lamp
4. **4** Communication unit connector (EXT1)
5. **5** Fall prevention hook
6. **6** Optional unit connector (EXT2)
7. **7** SD card access LED
8. **8** Battery holder
9. **9** DIP switch
10. **10** USB cable holding hole
11. **11** SD card connector
12. **12** Sound output connector (AUDIO)
13. **13** Power input terminal block
14. **14** Modular jack 1 (MJ1)
15. **15** Modular jack 2 (MJ2)
16. **16** PLC connector (CN1)
17. **17** 100BASE-TX/10BASE-T port (LAN)
18. **18** USB-A (U-A)

- 19.  USB mini-B (U-B)
- 20.  Screw hole
- 21.  Slide switch

System Configuration

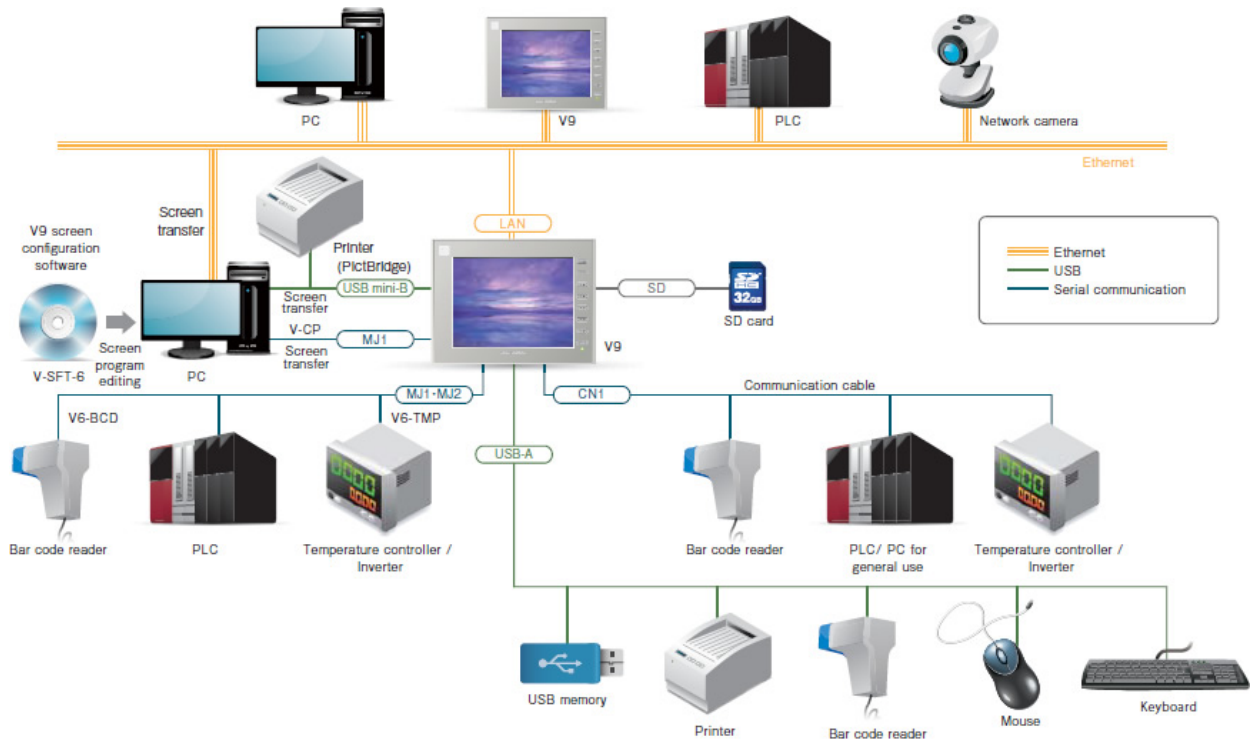

Models

